
COMMERCIAL DATA SHEET Quadra Plus 15 XT & Paddle



Billi Quadra Plus 15 with XT Touch Dispenser & Paddle Mixer

Enjoy all the space saving benefits of Billi's water cooled boiling and chilled Quadra systems PLUS a separate sink mixer to ensure safety and convenience for all users.







CHILLED

BOILING





Supplied standard with our sleek and contemporary touch sensitive XT dispenser and paddle lever mixer tap.

XT Touch Dispenser

Paddle Lever Mixer

Quadra Plus Under-Bench Unit





Features



SPACE SAVING DESIGN



OPERATE



ENERGY



EXCHANGE TECHNOLOGY



WATER COOLED TECHNOLOGY



NO CUPBOARD VENTILATION REQUIRED



GREENTAG CERTIFIED



PRODUCT SPECIFICATIONS

Water **Product** Model Dispenser Suggested 50° hot water 50° hot water **Boiling water** Chilled water code name capacity litres delivery litres delivery (cups delivery (cups supply no. of type people (initial drawdown) per hour per hour)* per hour) (amps)









904105TPUK

Quadra Plus 15 XT Touch

Up to 100

15

85

250

175

15

^{*} Based on a set volume of water being drawn every 30 seconds at an inlet temperature of average temperature 21°C. Each cup is equivalent to 170ml. Usage patterns and draw-off methods can impact recovery

992803 - 120mm Riser & Font

990714 - Tubing Extension Kit for Plus unit - 1.8mtrs



Finishes


Standard Finishes Special Order Finish


CH-Chrome BR-Brushed MB-Matte Black MW-Matte White RG-Rose Gold

Add the relevant Finish Code and the Country Identifier (UK) to the Product code to complete your specification eg 904105TPMBUK

TECHNICAL DRAWINGS


PRODUCT DIMENSIONS

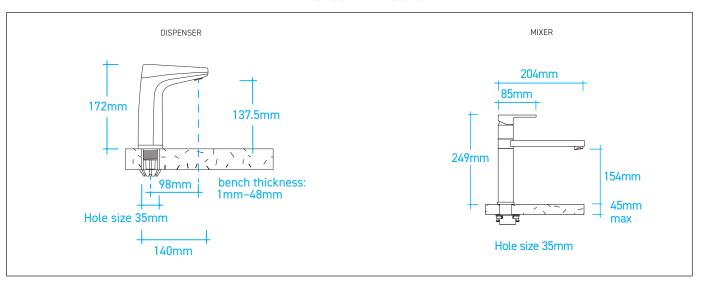

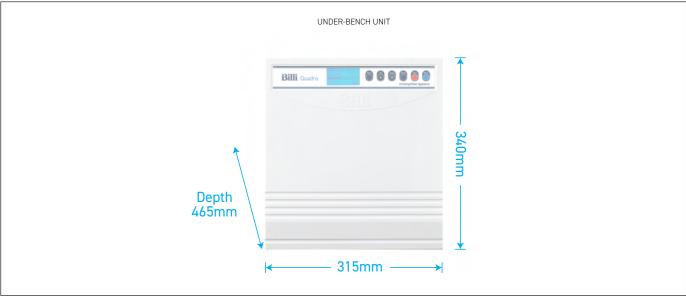

INSTALLATION REQUIREMENTS

PREFERRED INSTALLATION LAYOUT

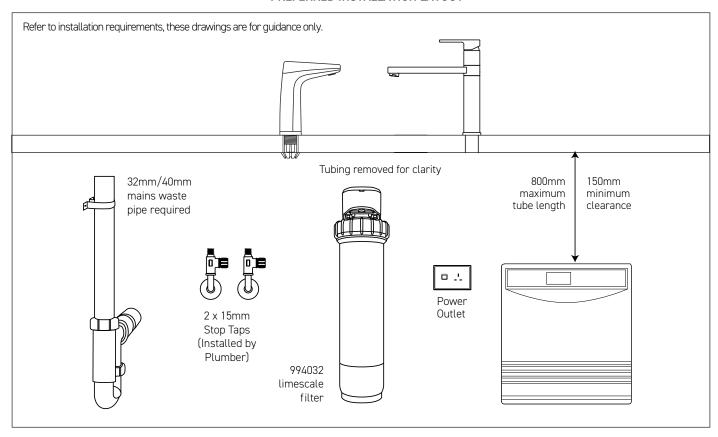

WATER SUPPLY

An accessible drinking water supply from a 15mm pipe with a minimum pressure of 4 bar static and 10 litres a minute flow should be located in the base unit of the installation location.

POWER SUPPLY

A dedicated 20amp double pole switched spur must be fitted at a high level and accessible within the cupboard. The unit comes with a 1 metre flex cord.

WASTE REQUIREMENTS

A 32mm/40mm mains waste pipe is required within the base unit. This pipe should include a trap or u-bend to prevent any unpleasant odours. If there is a spigot waste connection, two spigots are required to connect to the waste and condenser line.

WARRANTY

The Billi Quadra Plus Range is covered by a comprehensive 2 year warranty on all parts and labour.

FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology which provide superior taste, water quality, consistent filter life and peace of mind on the topic of hygiene.

Supplied: 994051 (5 micron)

On request: 994032 (recommended iX02 limescale filter)

CERTIFICATIONS & COMPLIANCE*

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: ISO 9001:2015, QEC 11627; WRAS certified; WELL Cornerstone Member; BREAMM compliant; LEED compliant; Equality Act Compliant; Global Greentag Certified.

* Drawings are for guidance during specification, refer to Installation requirements for final install. All efforts are made to ensure Certifications & Compliance claims are current, however this is subject to change without notice.

















Billi UK Limited

University Of Wolverhampton Science Park, Technology Centre, Glaisher Drive, Wolverhampton, WV10 9RU P 020 7456 6789 E marketing@billi-uk.com W www.billi-uk.com visit us at







